


'L' (m)	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5
'H' (mm)	0	5	10	14	19	24	29	33	38	43	48	53	57	62	67	72	77	81	86	90	93	95	97	99	100	100

MODIFIED WATTS PROFILE

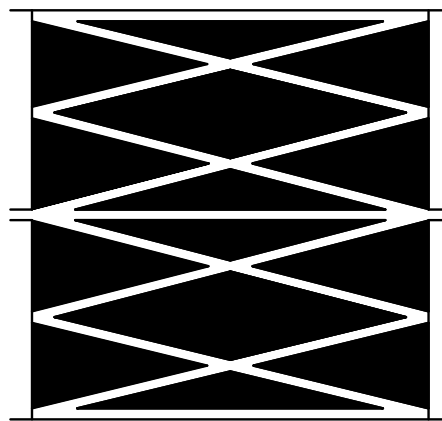

ROAD MARKING

NOTES:

1. Speed humps to be constructed in accordance with the "Guideline for the Use and Construction of Speed Control Humps 1987".
2. Humps must be carefully constructed to match a full size template to the above "Sine Profile" dimensions.
3. Hump feather edge must not enter the channel of the kerb & channel.
4. Hump edges must be keyed into existing surface not less than 25mm.
5. Painted markings must be 150mm wide reflectorized white and of the form shown above.

To ensure visibility the road humps should be marked with a pattern, which should appear as a minimum of four (4) crosses, when viewed from above, with the cross point on the apex of the hump. If the hump is narrower than 5.0m the centreline should be omitted.