


TRAFFIC ISLAND DETAIL

SCALE 1:20

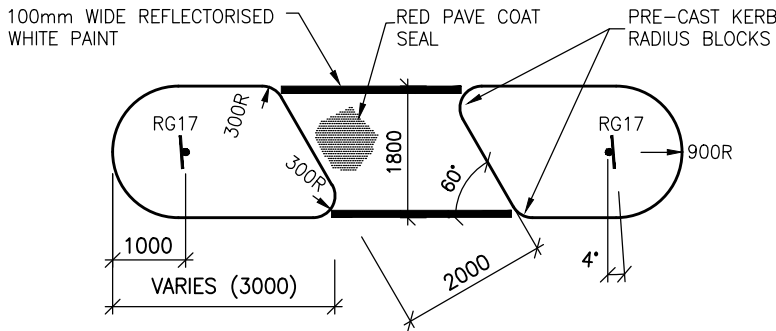

TACTILE INDICATORS
IF TACTILE INDICATORS ARE PLACED ON THE FOOTPATH TO INDICATE A CROSSING, THEY MUST ALSO BE PLACED ON THE REFUGE ISLAND.

ISLAND SURFACING
McCALLUM EXPOSED AGGREGATE CONCRETE.

NOTES:


1. Kerb blocks & insitu concrete – 20 MPa
2. Slip form concrete – 25MPa
3. All RG17 signs on traffic islands to be installed with 4° rotation.

ISLAND

SCALE 1:100

KERB TYPE

- *EXTRUDED MOUNTABLE KERBS
- *HUMES MOUNTABLE KERB BLOCKS

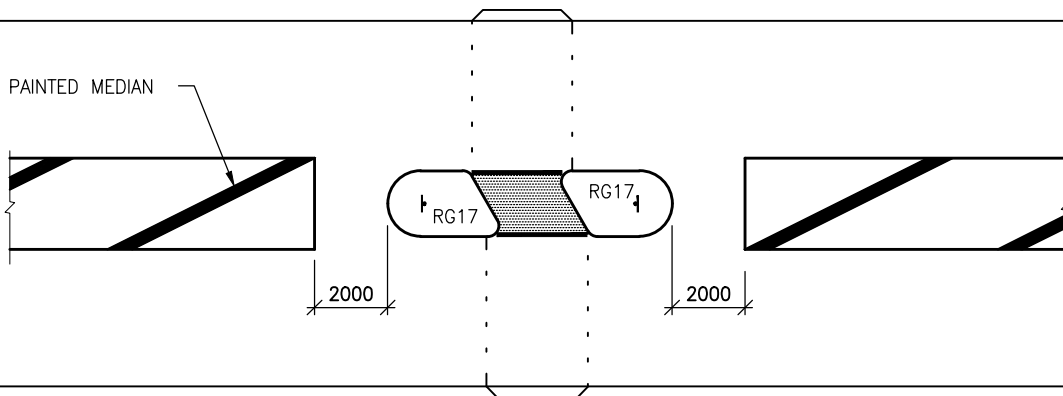

PRAM CROSSING AS PER SD 3.09

SCALE 1:200

ENGINEERING
STANDARDS MANUAL

ISSUE
SEPTEMBER 2010

**PEDESTRIAN
REFUGE
ISLAND**

STANDARD DETAIL

SD 3.30